



# *Technical Specifications Sheet.*

## **425 S**



**Precision** **Productivity** **Profitability**

# Advantages

- ◆ Low operating cost with high returns. Simple and easy maintenance.
- ◆ Always fresh concrete on demand, when and where you need it.
- ◆ For all types of concrete, high and low strength, from low PSI to 6000+PSI.
- ◆ Any slump including flowable fill, RCC, self compacting, zero slump and dry mix.
- ◆ Ideal for long distance travel sites or for on site production.
- ◆ Ideal for general construction, housing infrastructure, prefabricate and mining.
- ◆ Ideal for the controlling inventory precise computer measurement and material tracking.
- ◆ ideal for producing pumpable concrete shotcrete and gunite.

# Dimensions



**425 S**

Bins autonomy  
and capacity.




**5.2 yd<sup>3</sup>**

Average  
production speed.




**32.7 yd<sup>3</sup>/ hr.**

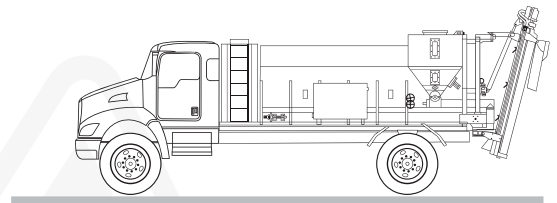

## Dimensions

A	96 in
B	129 1/2 in
C	130 in
D	9 in
E	57 in
F	104 1/2 in
G	138 5/8 in

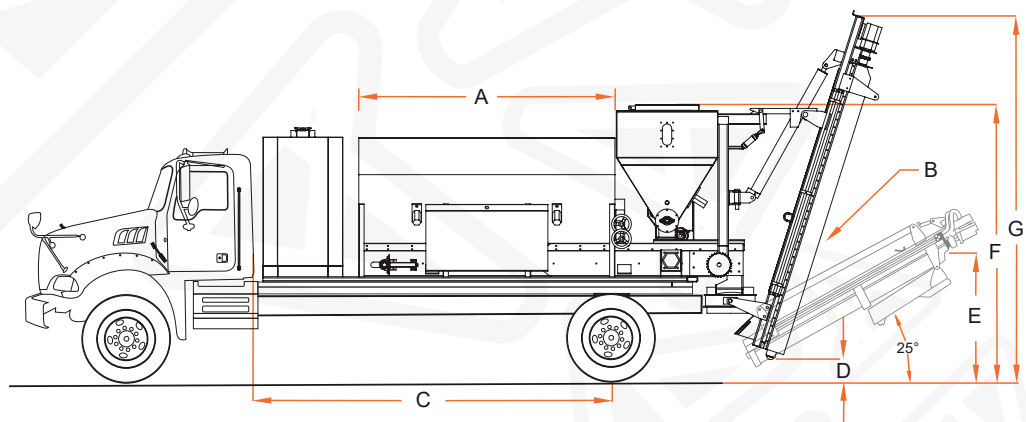

Approximate Weight: 6516.864 lbs.



[sales@metlagllc.com](mailto:sales@metlagllc.com)



[www.metlagllc.com](http://www.metlagllc.com)



Ph. +1 (956) 340 59 58